



## RELOK™

- ▶ By having a smoother interior, ReLok<sup>™</sup> annulus slides over bolt threads and does not lock out to thread interference.
- Same torque that is required to install ReLok™ nut/collar is used to dismantle joint.
- Reusable for multiple installations with similar vibration test results.
- No limits to bolt pre-load.
- ReLok™ consistently holds clamp load at various torque settings.



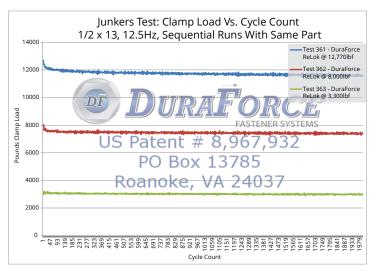

ReLok™is reusable & always reliable!

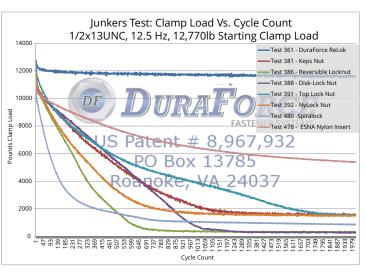

ReLok™holds strong while others fail!

Part #	Description
U375-URNC	ReLok™, Unitized Nut and Collar, 3/8-16 UNC, Grade 8, Plain (Phos & oil coating)
U500-URNC	ReLok™, Unitized Nut and Collar, 1/2″-13 UNC, Grade 8, Plain (Phos & oil coating)
U625-URNC	ReLok™, Unitized Nut and Collar, 5/8″-11 UNC, Grade 8, Plain (Phos & oil coating)
U750-URNC	ReLok™, Unitized Nut and Collar, 3/4″-10 UNC, Grade 8, Plain (Phos & oil coating)
U1000-URNC	ReLok™, Unitized Nut and Collar, 1″-8 UNC, Grade 8, Plain (Phos & oil coating)
U1125-URNC	ReLok™, Unitized Nut and Collar, 1-1/8″-7 UNC, Grade 8, Plain (Phos & oil coating)
U1375-URNC	ReLok™, Unitized Nut and Collar, 1-3/8″-6 UNC, Grade 8, Plain (Phos & oil coating)

Please inquire for the following options: Other Standard Coarse sizes, (-HC) Hexavalent Zinc - Yellow Finish, (-CZ) Clear Zinc - Silver Finish, (-ZP) Zinc Phosphate - Black finish, (F) Fine Threads, Metric sizes

## Miller Ingenuity is the exclusive distributor of ReLok™ fasteners.

## **Contact Details**

## Miller Ingenuity

1155 East Eighth Street, Winona, MN

Phone (507) 452-2461

Fax (507) 452-2463 www.milleringenuity.com