


# BEST PERFORMING LED.

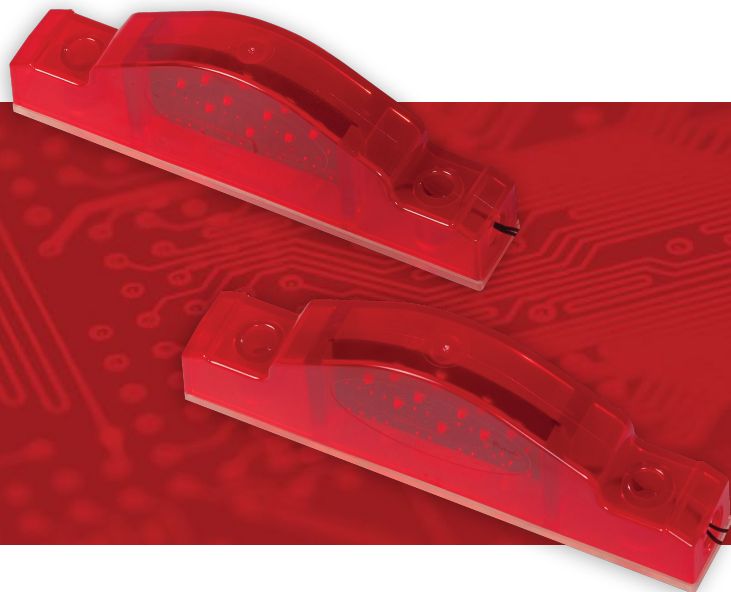

## EVERRAY™ Gate Arm Light

Miller Ingenuity's LED Gate Light features surface mounted LED technology, reducing board space as well as unneeded wire connections. Additional features include higher intensity light output and a wider beam angle; which surpasses the AREMA recommendations.

### FEATURES

Rugged injection molded polycarbonate housing can resist a "Knockdown" and can generally be re-used without replacement.

Individual LED circuit layout which prevents multiple LED failures.

Low power consumption means that this light is a low cost solution on crossings which do not meet FRA 234—85% of rated voltage at the tip light.

### SPECIFICATIONS

Range -8-14 Volts AC or DC

Viewing Angle,-70 Degrees

Temperature -40 C To +85 C

.45 Amps @ 10 Volts

4.5 Watts @ 10 Volts

20 AWG Wire

**Survives knock-downs • Installs in minutes • Low current draw**

PART NUMBER	DESCRIPTION	NOTES
1608-300-04	Gate Arm LED Light (Single)	-
1608-102	Kit, Hardware, Gate Arm Light	Includes hardware for 3 lights
1608-100-04	Complete Kit, Gate Arm LED Lights with Hardware (Set of 3)	Includes 3 Gate Arm LED Lights and all necessary hardware.